



NP12220

General Purpose AGM Battery

General Features

- Oxygen recombination technology: maintenance-free, no need to add water or acid
- The patent grid alloy: less gassing, low self-discharge, excellent corrosion resistance
- Design life is 3~5 years at 25°C under standby application, deep discharge recoverability
- High quality AGM separator: extend cycle life and prevent micro short circuit
- ABS container: increase the strength of battery




Application

- Uninterrupted Power Supply
- Emergency Power Supply
- Power Tools
- Security System
- Communication Equipment
- Fire Alarm
- Factory automation equipment
- Portable Electric Device


Specification

Nominal Voltage	12V
Nominal Capacity	22 Ah, C20@1.80Vpc, 25°C (77°F)
Dimension	Length 182mm (7.17 inch)
	Width 77mm (3.03 inch)
	Container Height 170mm (6.69 inch)
	Total Height (With Terminal) 170mm (6.69 inch)
Rated Capacity (25°C/77°F)	22 Ah/(20Hr, 1.80V/cell)
	21 Ah/(10Hr, 1.80V/cell)
	19 Ah/(5Hr, 1.75V/cell)
	18 Ah/(3Hr, 1.75V/cell)
Weight	9 Ah/(1Hr, 1.70V/cell)
	6.0 Kg ±5% (13.23 lbs)
	Terminal M5
Container Material	ABS
Operating Temp. Range	Discharge: -20 to +50°C(-4~122°F)
	Charge: -20 to +50°C(-4~122°F)
	Storage: -20 to +50°C(-4~122°F)
Capacity affected by Temperature	102% @ 40°C(104°F)
	100% @ 25°C(77°F)
	85% @ 0°C(32°F)
	65% @ -15°C(5°F)

Terminal Unit:mm



Dimension Unit:mm

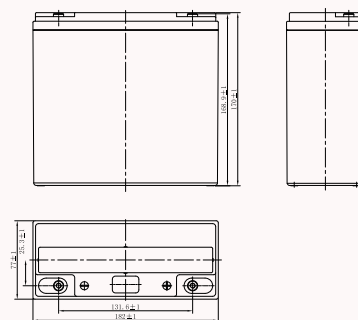





This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and Battery designs/specification are subject to modification without notice. Contact YHI Power for latest information.

YHI POWER Pty. Ltd Melbourne Head Office: 20-22 Venture Way, Braeside, VIC 3195 Ph: 03 9588 1888 Web: yhipower.com.au

Charge Performance

Constant Current Discharge Table (25°C/77°F) Unit: A														
F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	47.70	40.62	33.39	24.55	17.53	13.89	8.30	5.69	4.34	3.54	2.99	2.34	2.05	1.09
1.80V/cell	49.74	41.64	34.22	25.36	17.98	14.29	8.49	5.83	4.44	3.62	3.06	2.40	2.12	1.10
1.75V/cell	52.02	42.74	35.04	26.12	18.71	14.84	8.72	5.99	4.56	3.75	3.17	2.48	2.16	1.12
1.70V/cell	53.30	44.18	35.93	26.75	19.19	15.33	8.94	6.11	4.70	3.85	3.26	2.56	2.21	1.13
1.65V/cell	54.95	45.20	36.82	27.35	19.81	15.88	9.14	6.28	4.81	3.95	3.35	2.62	2.25	1.16
1.60V/cell	57.24	46.81	38.03	28.07	20.35	16.20	9.41	6.48	4.97	4.05	3.43	2.69	2.30	1.17

Constant Power Discharge Table (25°C/77°F) Unit: W														
F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	89.54	76.82	63.91	47.47	34.18	27.19	16.36	11.27	8.62	7.05	5.97	4.67	4.12	2.18
1.80V/cell	92.11	77.89	64.75	48.48	34.77	27.83	16.65	11.50	8.78	7.17	6.09	4.79	4.23	2.20
1.75V/cell	94.62	78.88	65.65	49.52	35.95	28.74	17.03	11.76	9.00	7.41	6.29	4.92	4.31	2.23
1.70V/cell	95.12	80.65	66.63	50.33	36.66	29.58	17.38	11.97	9.23	7.59	6.44	5.08	4.40	2.26
1.65V/cell	97.04	81.65	67.93	51.11	37.68	30.52	17.71	12.25	9.43	7.76	6.60	5.19	4.47	2.30
1.60V/cell	98.52	83.15	69.21	52.03	38.37	30.86	18.10	12.55	9.68	7.92	6.75	5.30	4.56	2.33

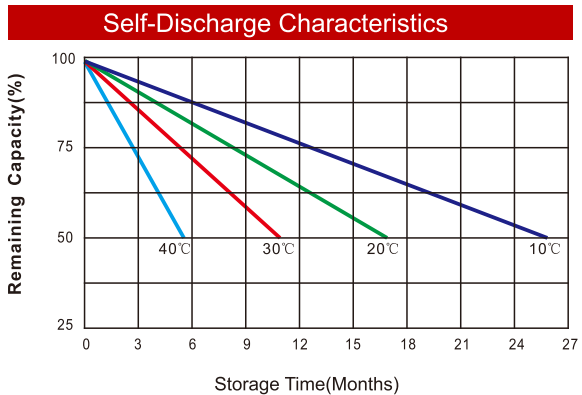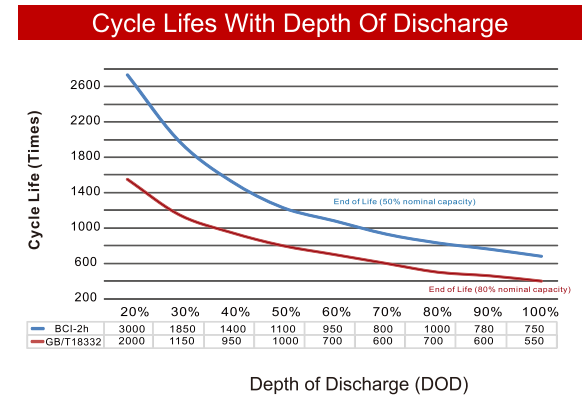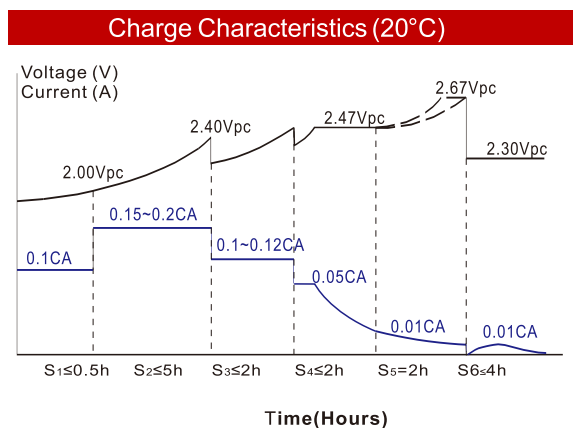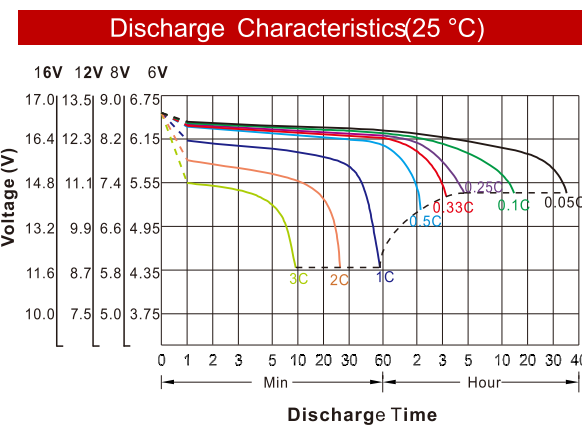

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and Battery designs/specification are subject to modification without notice. Contact YHI Power for latest information.