



# NP12750

General Purpose AGM Battery

## General Features

- Oxygen recombination technology: maintenance-free, no need to add water or acid
- The patent grid alloy: less gassing, low self-discharge, excellent corrosion resistance
- Design life is 6~9 years at 25°C under standby application, deep discharge recoverability
- High quality AGM separator: extend cycle life and prevent micro short circuit
- ABS container: increase the strength of battery



## Application

- Uninterrupted Power Supply
- Emergency Power Supply
- Power Tools
- Security System
- Communication Equipment
- Fire Alarm
- Factory automation equipment
- Portable Electric Device

## Specification

Nominal Voltage	12V
Nominal Capacity	75 Ah, C20@1.80Vpc, 25°C (77°F)
Dimension	Length 260mm (10.24 inch)
	Width 168mm (6.61 inch)
	Container Height 211mm (8.31 inch)
	Total Height (With Terminal) 213.5mm (8.41 inch)
Rated Capacity (25°C/77°F)	75 Ah/(20Hr, 1.80V/cell)
	72 Ah/(10Hr, 1.80V/cell)
	64 Ah/(5Hr, 1.75V/cell)
	61 Ah/(3Hr, 1.75V/cell)
Weight	30 Ah/(1Hr, 1.70V/cell)
	22.3 Kg ±5% (49.16 lbs)
	Terminal M6
Container Material	ABS
Operating Temp. Range	Discharge: -20 to +50°C(-4~122°F)
	Charge: -20 to +50°C(-4~122°F)
	Storage: -20 to +50°C(-4~122°F)
Capacity affected by Temperature	102% @ 40°C(104°F)
	100% @ 25°C(77°F)
	85% @ 0°C(32°F)
	65% @ -15°C(5°F)


### Terminal

Unit:mm



### Dimension

Unit:mm

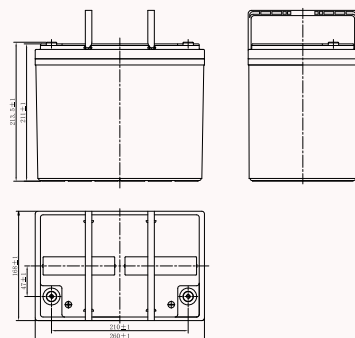





This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and Battery designs/specification are subject to modification without notice. Contact YHI Power for latest information.

YHI POWER Pty. Ltd Melbourne Head Office: 20-22 Venture Way, Braeside, VIC 3195 Ph: 03 9588 1888 Web: yhipower.com.au

Charge Performance

Constant Current Discharge Table (25°C/77°F) Unit: A														
F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	162.5	138.3	113.7	83.61	59.69	47.29	28.27	19.37	14.76	12.06	10.18	7.96	7.00	3.70
1.80V/cell	169.4	141.8	116.5	86.35	61.23	48.66	28.92	19.86	15.11	12.32	10.43	8.19	7.22	3.75
1.75V/cell	177.2	145.6	119.3	88.95	63.73	50.54	29.71	20.38	15.54	12.76	10.81	8.43	7.37	3.81
1.70V/cell	181.5	150.5	122.4	91.12	65.37	52.20	30.43	20.82	15.99	13.11	11.09	8.73	7.53	3.86
1.65V/cell	187.1	153.9	125.4	93.14	67.48	54.08	31.12	21.40	16.39	13.44	11.41	8.93	7.66	3.93
1.60V/cell	194.9	159.4	129.5	95.59	69.31	55.16	32.06	22.07	16.93	13.79	11.70	9.15	7.83	4.00

Constant Power Discharge Table (25°C/77°F) Unit: W														
F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	304.9	261.6	217.7	161.7	116.4	92.60	55.73	38.37	29.35	24.03	20.32	15.92	14.02	7.42
1.80V/cell	313.7	265.3	220.5	165.1	118.4	94.78	56.70	39.16	29.91	24.43	20.76	16.32	14.42	7.51
1.75V/cell	322.2	268.6	223.6	168.6	122.4	97.89	58.00	40.05	30.65	25.24	21.42	16.75	14.69	7.60
1.70V/cell	324.0	274.7	226.9	171.4	124.9	100.8	59.21	40.76	31.43	25.86	21.93	17.31	14.99	7.71
1.65V/cell	330.5	278.1	231.4	174.0	128.3	103.9	60.31	41.73	32.10	26.42	22.49	17.68	15.22	7.84
1.60V/cell	335.5	283.2	235.7	177.2	130.7	105.1	61.65	42.76	32.96	26.98	22.99	18.06	15.53	7.95

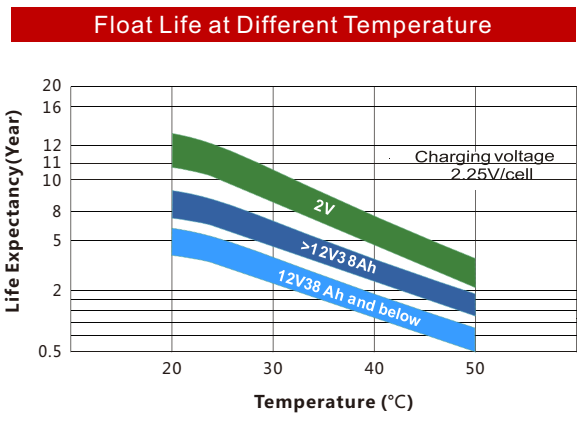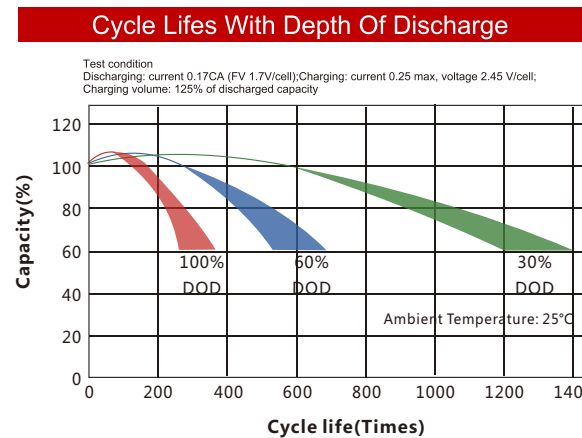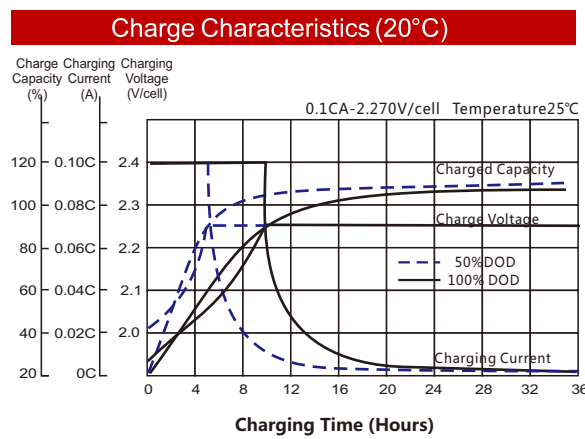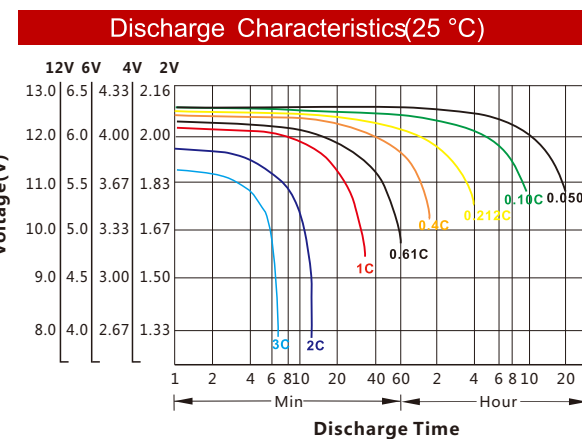

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and Battery designs/specification are subject to modification without notice. Contact YHI Power for latest information.