

# KM27L

# DATA SHEET




Case :	Black
Cover :	Black
Handle :	Black

PERFORMANCE	
Nominal Voltage [V] :	12
20HR Capacity [Ah] :	90
Reserve Capacity [min] :	160
Cold Cranking Amps (SAE) [A] :	750
Marine Cranking Amps [A] :	920

DIMENSIONS AND WEIGHT	
Length [mm] ( $\pm 2$ ) :	303
Width [mm] ( $\pm 2$ ) :	172
Height [mm] ( $\pm 3$ ) :	200
Total Height [mm] ( $\pm 3$ ) :	221
Battery Weight [kg] ( $\pm 3\%$ ) :	20.9

Terminal Layout / Polarity	Terminal Type	Base Hold Down
	<p>Twin</p> <p>5/16"-18 THREADS</p>	<p>B1</p> <p>10.5mm on long sides only</p>

20HR Capacity Test Graph

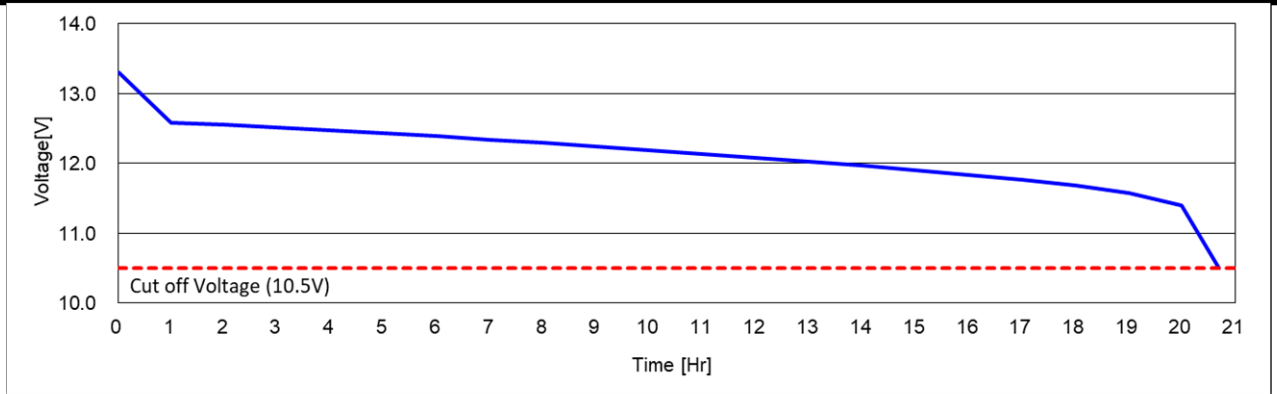

Cold Cranking Test Graph (-18°C, Icc 750A)

