



NP1223

General Purpose AGM Battery

General Features

- 100% before shipment testing, stable and reliable long-term quality
- patented grid alloy formula and updated manufacturing technique
- completely sealed and maintenance-free, low self-discharge
- Excellent charging and re-charging acceptance
- Cycle use: More than 260 cycles at 100% DOD
- Floating & standby use: 3-5 years




Application

- Alarm System
- Cable Television
- Security System
- Medical Equipment
- UPS
- Toys
- Communication Equipment
- Emergency Power System
- Power tools
- Control Equipment

Specification

Battery Model	NP1223 12V2.3AH			
Designed Floating Life	3~5 Years			
Capacity (25°C)	20HR(0.115A,10.5V)	2.30 AH		
	10HR(0.22A,10.5V)	2.20AH		
	5HR(0.41A,10.5V)	2.05AH		
	1HR(1.38A,10.5V)	1.38AH		
Dimensions	Length	179mm (7.05inch)		
	Width	35mm (1.38inch)		
	Height	61mm (2.40inch)		
	Total Height	66mm (2.60inch)		
Approx. Weight	0.92Kg (2.03 lbs) ±5%			
Internal Resistance	Full charged at 25°C : ≤160mΩ			
Self Discharge	2% of capacity declined per month at (25°C)			
Capacity Affected by Temp.(20HR)	40°C	25°C	0°C	-15°C
	102%	100%	85%	65%
Charge Voltage(25°C)	Cycle use		Float use	
	14.4-15.0V(-30mV/°C) ,Max Current: 0.39A		13.6-13.8V (-20mV/°C)	

Terminal

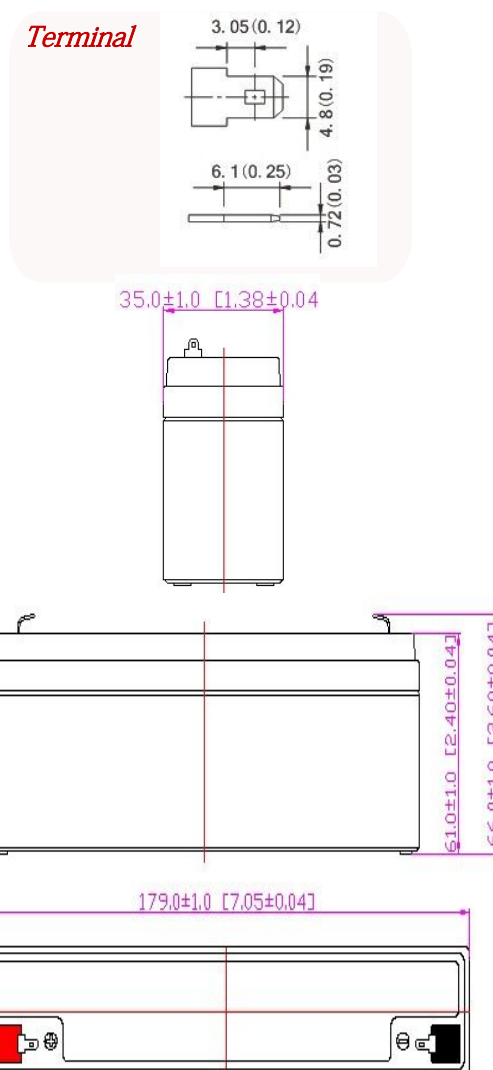

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and Battery designs/specification are subject to modification without notice. Contact YHI Power for latest information.

Charge Performance

Constant Current Discharge(CC,Unit:A) at 25°C(77°F)												
F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	6.34	4.69	3.40	2.29	1.33	0.76	0.58	0.464	0.399	0.325	0.213	0.111
1.80V/Cell	6.46	4.77	3.46	2.33	1.35	0.78	0.59	0.473	0.406	0.331	0.217	0.113
1.75V/Cell	6.59	4.86	3.53	2.37	1.38	0.79	0.60	0.482	0.414	0.337	0.221	0.115
1.70V/Cell	7.18	5.16	3.74	2.47	1.40	0.80	0.61	0.491	0.421	0.343	0.225	0.117
1.67V/Cell	7.90	5.59	4.06	2.61	1.42	0.81	0.62	0.496	0.426	0.347	0.228	0.118
1.60V/Cell	8.56	5.89	4.27	2.72	1.43	0.82	0.63	0.501	0.430	0.351	0.230	0.120

Constant Power Discharge (CP,Unit:W) at 25°C(77°F)												
F.V/Time	5Min	10Min	15Min	30Min	1Hr	2Hr	3Hr	4Hr	5Hr	6Hr	10Hr	20Hr
1.85V/Cell	12.37	9.14	6.63	4.46	2.59	1.48	1.13	0.91	0.78	0.63	0.42	0.22
1.80V/Cell	12.61	9.31	6.75	4.54	2.64	1.51	1.16	0.92	0.79	0.65	0.42	0.22
1.75V/Cell	12.84	9.49	6.88	4.63	2.69	1.54	1.18	0.94	0.81	0.66	0.43	0.22
1.70V/Cell	14.00	10.05	7.29	4.81	2.73	1.57	1.20	0.96	0.82	0.67	0.44	0.23
1.67V/Cell	15.41	10.91	7.91	5.08	2.76	1.58	1.21	0.97	0.83	0.68	0.44	0.23
1.60V/Cell	16.70	11.48	8.32	5.30	2.79	1.60	1.22	0.98	0.84	0.68	0.45	0.23

