



NP12260



General Purpose AGM Battery

Applications

- > EPS/Power systems
- > Power tools
- > Security system/Fire alarm
- > Factory automation equipment
- > Emergency lighting/Auto control system
- > Portable electric device
- > Other general purpose

Specification


Nominal Voltage	12V
Nominal Capacity	26Ah
Design life	5 years
Terminal	M5
Approx. Weight	Approx 7.70kg (17.0lbs)
Container Material	ABS
Rated Capacity	26.0Ah 20Hour Rate (1.30A to 10.5V)
	20.2Ah 3Hour Rate (6.73A to 10.5V)
	17.2Ah 1Hour Rate (17.2A to 9.60V)
Internal resistance	Full charged at 25°C: 15.0 mΩ
Max. Discharge Current	390A(5S)
Operating Temperature	Discharge: -40 ~60°C(-40~ 140°F)
	Charge: -20 ~50°C(-4~ 122°F)
	Storage: -20 ~50°C(-4~ 122°F)
Charge current:	Max. 6.50A ; Recom.2.60A
Charge Method (25 °C)	Float Charge: 13.5-13.8V, recom. 13.5V(-18mV/ °C)
	Equalize charge: 13.8-14.1V, recom. 14.1V(-24mV/ °C)
	Cycle charge: 14.4-15.0V, recom. 14.4V(-30mV/ °C)
Self discharge	3% of capacity declined per month at 25°C

General Features

- > High corrosion resistant performance: Pb-Ca multi-alloy grid
- > High energy density and power density
- > Optimized capability of instant high-current discharging
- > Excellent charge acceptance ability
- > Strong high and low temperature performance
- > Precision sealing technology



Dimension: 166(L)×175(W)×125(H)×125(TH) Unit: mm

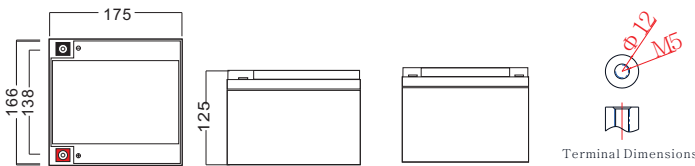

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	103	67.3	50.2	32.9	17.1	9.83	7.17	5.75	4.89	3.23	2.57	1.38
1.65V	102	64.5	46.0	31.2	16.1	9.44	6.97	5.57	4.79	3.17	2.55	1.35
1.70V	83.7	60.6	43.0	30.3	15.6	9.25	6.84	5.28	4.73	3.12	2.49	1.33
1.75V	77.7	57.7	40.1	29.5	15.0	9.02	6.73	5.20	4.53	3.04	2.45	1.30
1.80V	71.6	54.3	37.2	28.6	14.5	8.79	6.38	5.09	4.34	2.97	2.39	1.25


Constant Power Discharge Characteristics Unit: W/cell (25°C, 77°F)

F.V/Time	5min	10min	15min	30min	1h	2h	3h	4h	5h	8h	10h	20h
1.60V	193	121	91.9	55.5	31.5	18.4	13.6	10.9	9.24	6.09	4.99	2.74
1.65V	177	115	86.3	55.2	29.7	17.7	13.2	10.5	9.05	6.00	4.89	2.66
1.70V	164	111	82.3	55.1	28.8	17.4	13.0	10.0	8.79	5.93	4.85	2.63
1.75V	148	108	79.4	54.4	27.8	17.0	12.8	9.88	8.63	5.69	4.74	2.58
1.80V	133	104	75.9	54.0	27.5	16.8	12.4	9.79	8.41	5.51	4.65	2.55


Disclaimer: Manufacturers have the right to self-modify the parameters of the product updates, please keep in touch with manufacturers to obtain the latest information.

NP12260


Discharge characteristic

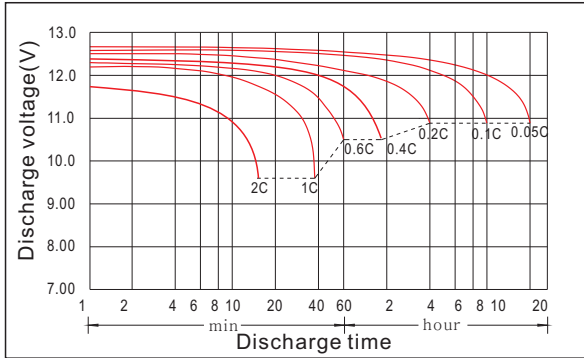


Charging characteristic

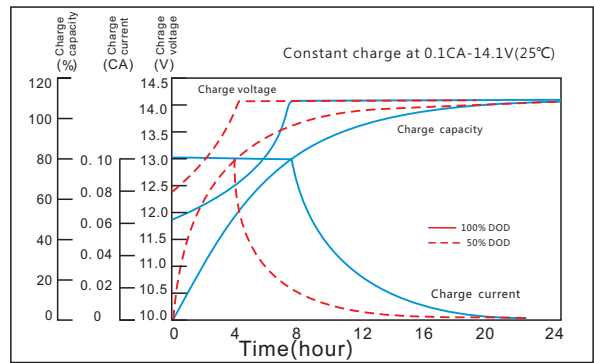


The effect of temperature on capacity

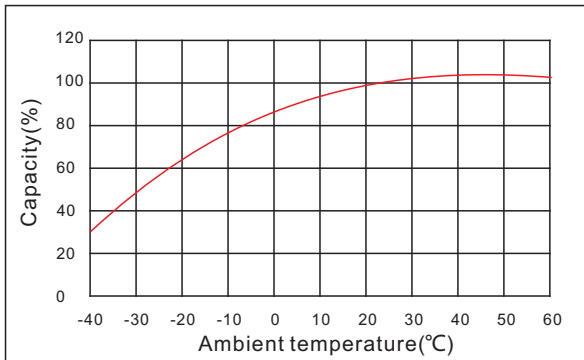

The effect of discharge depth on cycle life

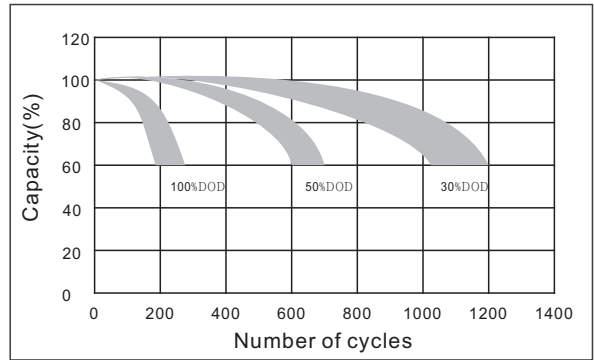

Curves of self-discharge

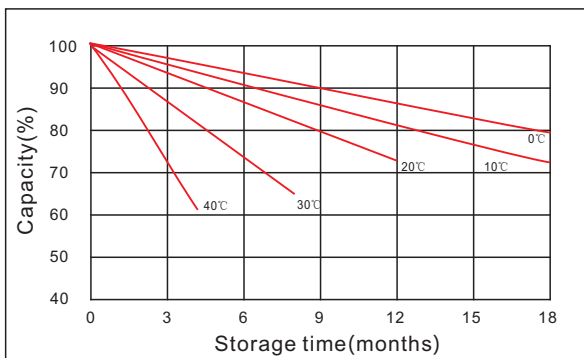

Curves of open circuit voltage vs. capacity

