

## Overview

Vision Technology provides safe LiFePO4 battery solutions for UPS and Energy storage system. This battery system serves for UPS and Energy storage system with perfect compatibility and safe long cycle life.

## Features

- Can/RS485 Communication output for monitoring
- Achieve up 32 BMU in cascade communication
- Internal cell balancing ,Passive equalization , the maximum equalization current up to 300mA
- High-precision cell voltage and temperature acquisition:  $\pm 3\text{mv}$ ,  $\pm 1^\circ\text{C}$ ;
- Fan control circuit and interface, realize heat dissipation inside the module

## Module Preview



Module 51.2V100A


## Performance Data

Time(min)	10	15	30	45	60
Constant Power(kw)	250.8	204.6	108.2	72.15	55.2
Constant Current(A)	490	400	200	133.3	100


## Rack Specification

Voltage Range(V)	492.8~607.2	
Cell	3.2V50Ah	
Series & Parallels	176S2P	
Rated Voltage(V)	563.2	
Rated Capacity(Ah)	100	
Rated Energy(KWh)	56.32	
Maximum Charge Current(A)	100	
Discharge Cut-off Voltage(V)	492.8	
Charge Voltage(V)	598.4~ 607.2	
Cycle Life(@25°C ,1C/1C,100%DOD)	>2500	
Short-circuit Current( < 10ms)	Approx.9000A	
System Dimension(W* D* H)	(600*1000*2300 ) mm	
Total Weight(Kg)	Approx.970	
Internal Resistance Fully Charged@ 25	60mOhms	
Thermal Management	Air Cooling	
Operating Temperature	Charge	0 ~ 50
	Discharge	-20 ~ 65
Operating Humidity	< 95%R.H.	
Communication	CAN/RS485	
Dry Contact	Y	
System Parallels		15 (GBMS)
		> 15 (GBMS+IPC)
Screen	Optional	

## Module size

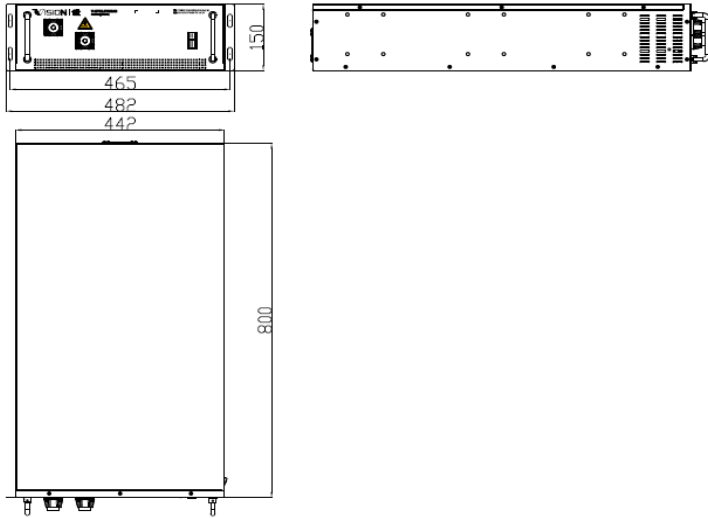

## Rack

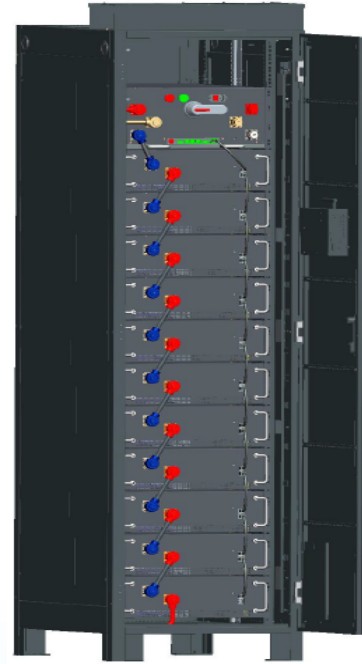

Rack TP220(S)

TP220S-with LCD TP220-without LCD

## Characteristics Curve

