



TRUE FRONT ACCESS

TEL 12-105 FNSGC, TEL 12-115FNGC,
TEL 12-170FGC, TEL 12-210FGC



Valve Regulated Lead Acid Battery

Designed for telecom cycling power applications,
Optimized for unstable electrical networks.



Typical Hybrid Remote Site

TRUE Performance - 100% out of box capacity ratings at installation

TRUE Front Access Terminals - ensuring reliability & connection versatility

TRUE High Energy Density - highest true energy density solution in the market

TRUE Long life design - Telcordia SR-4228 industry leading over 10 year service life

TRUE Flexibility - multiple models to fit each customers power system demands



APPLICATIONS:

- unstable networks
- Wireline
- Wireless
- Customer Premise / PBX
- Broadband
- Microwave Repeater
- Fiber Optic Regen Sites

INDOOR / OUTDOOR INSTALLATIONS

- Sealed Cabinet Systems
- Rack Systems

FEATURES AND BENEFITS

Long life cycle service design:

- Proven C&D DCS plate technology,
- Maximum cycle life for deep cycle & hybrid applications,
- High charge acceptance for rapid recharge.

True front access design:

- True direct connect terminal for reliability
- C&D Ohmic Ring for accurate testing
- Optional true front access gas collection system for sealed cabinet installation,
- Connection versatility

Maximum performance:

- Superior output due to direct terminal connection,
- Low internal resistance.

Compliant to major global specifications:

- British Standard BS 6290: Part 4:1997,
- IEC 60896-21/22
- Telcordia SR-4228,
- Eurobat Guide Classification: long life,
- Bellcore GR-63-CORE & GR-1089-Core
- UL94 V-0FR,
- Non-hazardous, not restricted for any transportation mode (air, water or land)

Specifications


12 Volt Ampere Hour Capacity

Ampere Hour Capacity to 1.75 Volts per Cell at 25°C (77°F)
Discharge in Hours

Model	1	2	3	4	5	6	7	8	9	10	12	14	16	18	20	24	36	48	72
TEL 12-105 FNSGC	55.2	64.5	70.1	74.9	78.5	81.7	84.8	86.0	87.1	88.2	90.3	92.2	93.9	95.4	95.6	97.5	102.0	100.6	102.4
TEL 12-115 FNGC	57.8	67.5	73.4	78.5	82.2	85.5	88.8	90.0	91.2	92.3	94.6	96.6	98.3	99.9	100.1	102.1	106.8	105.3	107.2
TEL 12-170 FGC	89.2	104.2	113.4	121.1	126.9	132.0	137.1	139.0	140.9	142.5	146.1	149.1	151.8	154.3	154.5	157.7	164.9	162.6	165.6
TEL 12-210 FGC	109.1	127.5	138.7	148.2	155.2	161.5	167.7	170.0	172.3	174.3	178.7	182.4	185.8	188.7	189.1	192.9	201.8	198.9	202.6

Battery Model	Voltage Per Unit	Ampere Hours Capacity 8 Hour Rate @ 77°F (25°C) to 1.75EPV per cell	Ampere Hours Capacity 10 Hour Rate @ 68°F (20°C) to 1.80EPV per cell	IEC Short Circuit Current (A)	IEC Resistance (mOhms)	Midtronics / Mhos	Weight kg
TEL 12-105FNSGC	12V	86	85	1897.5	6.6	1050.0	33.0
TEL 12-115FNGC	12V	90	89	2164.6	5.7	1090.0	34.4
TEL 12-170FGC	12V	139	138	2554.0	4.9	1400.0	50.9
TEL 12-210FGC	12V	170	168	2895.8	4.3	1600.0	60.6


Dimensions

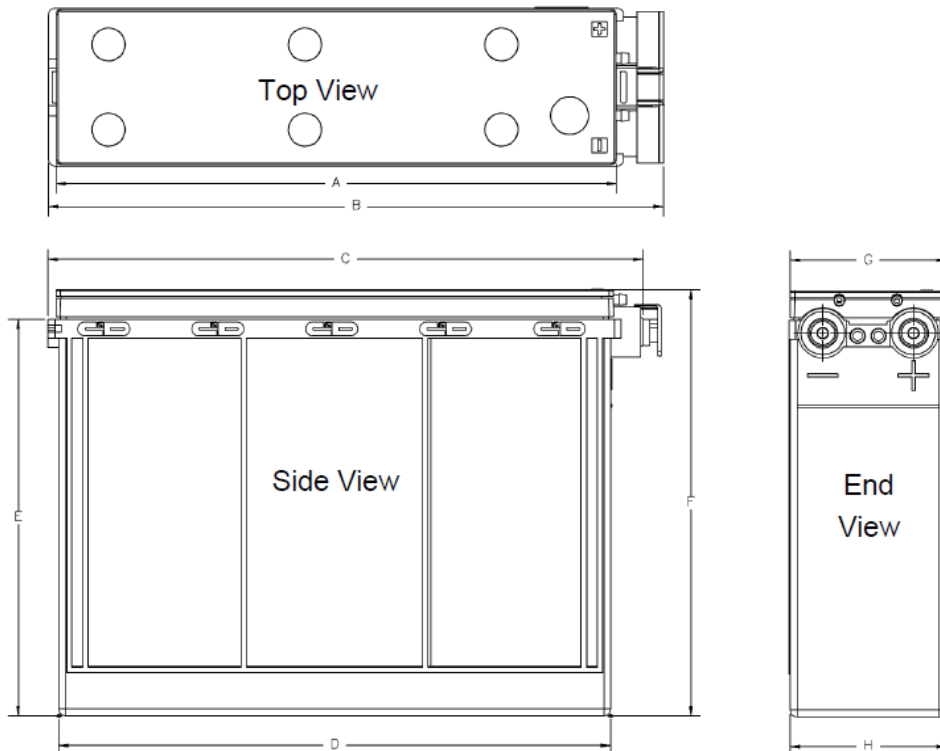


- Front access to connections:
- Eases installation,
 - Improves safety for maintenance,
 - Increases overall power density.

Model	A		B		C		D		E		F		G		H	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
TEL 12-105FNSGC	14.70	373.32	16.14	410.00	15.66	397.74	14.53	369.01	10.52	267.28	11.36	288.50	4.20	106.62	4.09	103.99
TEL 12-115FGC	18.63	473.31	20.10	510.53	19.62	498.28	18.49	469.54	8.47	215.22	9.31	236.45	4.33	109.98	4.25	107.95
TEL 12-170FGC	20.30	515.59	21.99	558.52	21.52	546.51	20.16	512.17	10.59	268.86	11.22	284.95	4.95	125.73	4.86	123.39
TEL 12-210FGC	20.29	515.47	21.99	558.52	21.52	546.51	20.16	512.17	12.22	310.31	12.91	327.85	4.95	125.73	4.86	123.39


Detail of Terminal

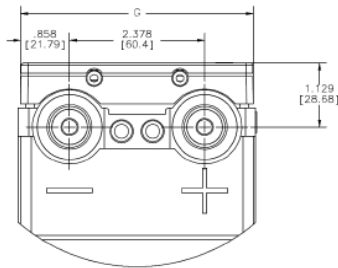


TEL 12-105FNSGC

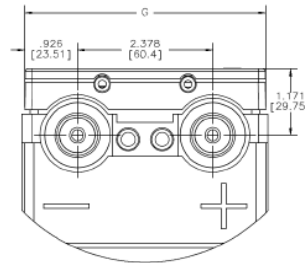

TEL 12-115FNGC

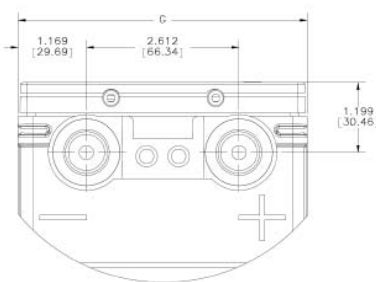

TEL 12-170FGC

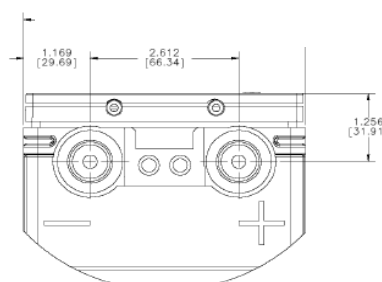


TEL 12-210FGC

*All dimensions are for reference only. Contact a C&D Representative for complete dimensional information.


Specifications

Operating Temperature Range with temperature compensation	Discharge: -40° C (-40° F) to + 71° C (160° F) Charge: -23° C (-10° F) to + 60° C (140° F)
Nominal Operating Temperature Range	20° C (+68° F) to + 35° C (95° F)
Recommended Maximum Charging Current Limit	0.2 C ₈
Float Charging Voltage	13.65 ± 0.15 VDC average per 12V unit
Maximum AC Ripple (Charger)	0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Max voltage allowed = 1.4% RMS (4% P-P) Max current allowed = C/20
Self Discharge	Battery can be stored up to 6 months at 25° C (77° F) before a freshening charge is required. Batteries stored at temperatures greater than 25° C (77° F) will require recharge sooner than batteries stored at lower temperatures. See C&D brochure 41-7272, Self-Discharge and Inventory Control for details.
Equalize charge & cycle service voltage	14.40 to 14.80 VDC average per 12V unit @ 25° C (77° F)
Terminal	Threaded copper alloy insert terminal to accept: -M8 bolt (TEL12-105 FNSGC, TEL12-170FGC, TEL12-210 FGC) -M6 bolt (TEL12-115 FNGC)
Terminal Hardware Initial Torque	18 N-m (160 in.-lbs) for: TEL12-105 FNSGC, TEL12-170FGC, TEL12-210 FGC 12 N-m (107 in.-lbs) for: TEL12-115 FNGC


Industry leading cycle life

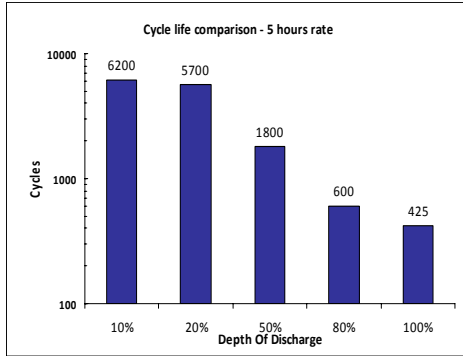

Capacity vs. Temperature

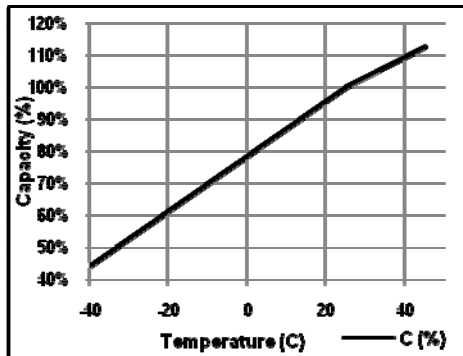

Cycle life vs. Temperature

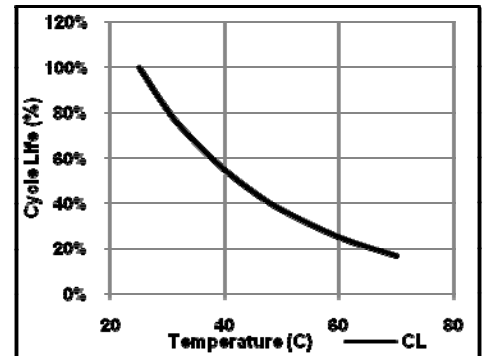

Constant Current Discharge Table - Amps at 25°C (77°F)

TEL 12-105FN5GC

Operating Time (hrs)

EPV	1	2	3	4	5	6	7	8	9	10	12	14	16	18	20	24	36	48	72
1.75	55.2	32.2	23.4	18.7	15.7	13.6	12.1	10.7	9.7	8.8	7.5	6.6	5.9	5.3	4.8	4.1	2.8	2.1	1.4
1.80	53.7	31.6	23.0	18.4	15.4	13.4	11.9	10.6	9.5	8.7	7.4	6.5	5.7	5.2	4.7	4.0	2.8	2.1	1.4
1.85	50.2	30.7	22.3	17.7	14.8	12.9	11.5	10.2	9.2	8.4	7.1	6.2	5.5	5.0	4.5	3.9	2.7	2.0	1.4
1.90	44.6	27.9	20.3	16.2	13.6	11.8	10.5	9.5	8.5	7.8	6.7	5.8	5.2	4.7	4.2	3.6	2.5	1.8	1.3

TEL 12-115FN5GC

Operating Time (hrs)

EPV	1	2	3	4	5	6	7	8	9	10	12	14	16	18	20	24	36	48	72
1.75	57.8	33.7	24.5	19.6	16.4	14.2	12.7	11.3	10.1	9.2	7.9	6.9	6.1	5.6	5.0	4.3	3.0	2.2	1.5
1.80	56.2	33.1	24.0	19.3	16.2	14.1	12.5	11.1	10.0	9.1	7.7	6.8	6.0	5.4	4.9	4.2	2.9	2.2	1.5
1.85	52.5	32.1	23.3	18.6	15.5	13.5	12.0	10.7	9.6	8.8	7.5	6.5	5.8	5.2	4.8	4.1	2.8	2.1	1.4
1.90	46.7	29.2	21.3	17.0	14.3	12.4	11.0	9.9	8.9	8.2	7.0	6.1	5.4	4.9	4.4	3.8	2.6	1.9	1.3

TEL 12-170FGC

Operating Time (hrs)

EPV	1	2	3	4	5	6	7	8	9	10	12	14	16	18	20	24	36	48	72
1.75	89.2	52.1	37.8	30.3	25.4	22.0	19.6	17.4	15.7	14.3	12.2	10.7	9.5	8.6	7.7	6.6	4.6	3.4	2.3
1.80	86.8	51.1	37.1	29.7	25.0	21.7	19.3	17.1	15.4	14.0	12.0	10.4	9.3	8.4	7.6	6.5	4.5	3.4	2.3
1.85	81.1	49.6	36.0	28.6	24.0	20.9	18.5	16.5	14.8	13.5	11.5	10.1	8.9	8.1	7.3	6.3	4.4	3.2	2.2
1.90	72.0	45.1	32.9	26.3	22.1	19.1	17.0	15.3	13.8	12.6	10.8	9.4	8.4	7.6	6.8	5.8	4.0	3.0	2.0

TEL 12-210FGC

Operating Time (hrs)

EPV	1	2	3	4	5	6	7	8	9	10	12	14	16	18	20	24	36	48	72
1.75	109.1	63.7	46.2	37.1	31.0	26.9	24.0	21.3	19.1	17.4	14.9	13.0	11.6	10.5	9.5	8.0	5.6	4.1	2.8
1.80	106.2	62.5	45.4	36.4	30.6	26.5	23.6	20.9	18.9	17.2	14.6	12.8	11.4	10.2	9.3	8.0	5.6	4.1	2.8
1.85	99.2	60.7	44.0	35.0	29.4	25.5	22.7	20.1	18.2	16.5	14.1	12.3	10.9	9.9	9.0	7.7	5.4	3.9	2.7
1.90	88.1	55.2	40.2	32.1	27.0	23.4	20.7	18.7	16.9	15.4	13.2	11.5	10.2	9.2	8.4	7.1	4.9	3.7	2.5

* Note: F= True Front Access , N= Narrow width format, S= Short Depth, G= Central Gas Collection System, C= cycling ability.

* All data shall be changed without prior notice, C&D reserves the right to explain and update the information contained herein.



1400 Union Meeting Road
P.O.Box 3053 • Blue Bell, PA 19422-0858
(215) 619-2700 • Fax (215) 619-7898 • (800) 543-8630
www.cdtechno.com

Any data, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application.